


คู่มือการอัปเดต Profile และ อัปเดต Firmware

กรณีครั้งแรกที่ใช้งานเครื่อง

เปิด Browser เข้าอุปกรณ์ ด้วยไอพี 192.168.1.1 โดยใช้ Username **admin** Password **admin** (กรณีเข้าใช้งานครั้งแรก อุปกรณ์จะให้ทำการเปลี่ยนพาสเวิร์ด โดยข้อกำหนด Password เป็น **Admin123**) จากนั้นกด OK

หากดำเนินการครั้งแรกแล้วไปแล้วให้ข้ามไปแล้วใช้กรณีหลังจากมีการเปลี่ยนรหัสผ่านของอุปกรณ์

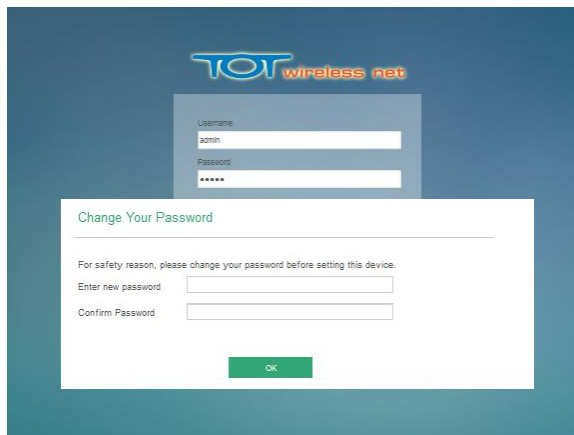

กรณีหลังจากมีการเปลี่ยนรหัสผ่านของอุปกรณ์

เปิด Browser เข้าอุปกรณ์ ด้วยไอพี 192.168.1.1 โดยใช้ Username **admin** Password **Admin123** (อักษร A ตัวพิมพ์ใหญ่) หรือ ตามที่ผู้ใช้งานกำหนด (แนะนำให้ตั้งค่าตาม กรณีครั้งแรกที่ใช้งานเครื่อง)

การอัปเดตไฟล์คอนฟิก Profile สำหรับอุปกรณ์ Indoor และ Pocket ยี่ห้อ ZyXEL

1. เลือกคลิกที่ เมนู **System** (แถบเมนูหลักด้านบน) > เลือก **Settings Profile** (แถบเมนูซ้ายมือ) > **Apply Profile from File** > คลิกเลือกไฟล์คอนฟิกที่ได้ทำการดาวน์โหลดไว้(ชื่อไฟล์ **profile_backup.zip**) กด Apply อุปกรณ์จะทำการรีบูต

(สามารถดาวน์โหลดไฟล์คอนฟิก Profileได้ที่ <http://wcs.intranet.tot.co.th/download/category/3-firmware>)



The screenshot displays the ZyXEL web management interface. At the top, there is a navigation bar with the ZyXEL logo and tabs for Home, Internet, Wi-Fi, Router, Applications, and System. The System tab is active. On the left, a sidebar menu lists System Information, User Account, Settings Profile (highlighted), Firmware Upgrade, Time Settings, and System Log. The main content area is titled 'Reset Settings' and includes a 'Restore Factory Default' button. Below this is the 'Save Current Settings' section, which has a 'New Profile Name' field containing 'My Settings Profile' and a 'Save' button. A 'Profile List: 0 / 5' section shows an empty table with columns for Profile Name, Saved Date, and Action. The 'Import & Export Settings Profile' section at the bottom contains two rows: 'Apply Profile from File' with a file selection button and an 'Apply' button, and 'Export Profile to File' with a dropdown menu set to 'Current Settings' and an 'Export' button.

The screenshot shows a web browser window displaying the ZyXEL 4G Hotspot management interface. The address bar shows the URL `https://192.168.1.1/system/system_profile.html`. The interface is in Thai language and features a sidebar with navigation options: System Information, User Account, Settings Profile (selected), Firmware Upgrade, Time Settings, and System Log.

The main content area is titled 'Reset Settings' and includes a 'Restore Factory Default' button. Below this is the 'Save Current Settings' section, which has a 'New Profile Name' field containing 'My Settings Profile' and a 'Save' button. A 'Profile List' table shows 0 profiles out of 5.

The 'Import & Export Settings Profile' section contains two main actions: 'Apply Profile from File' and 'Export Profile to File'. The 'Apply Profile from File' section shows a file selection button and a text input field containing 'profile_backup.zip', with an 'Apply' button next to it. The 'Export Profile to File' section shows a dropdown menu set to 'Current Settings' and an 'Export' button.

A file explorer window is open over the 'Desktop' folder, showing a file named 'profile_backup' with a date modified of '30/1/2563 9:33'. The file is a compressed zip file. The file name 'profile_backup' is entered in the 'File name' field, and the 'Open' button is highlighted.

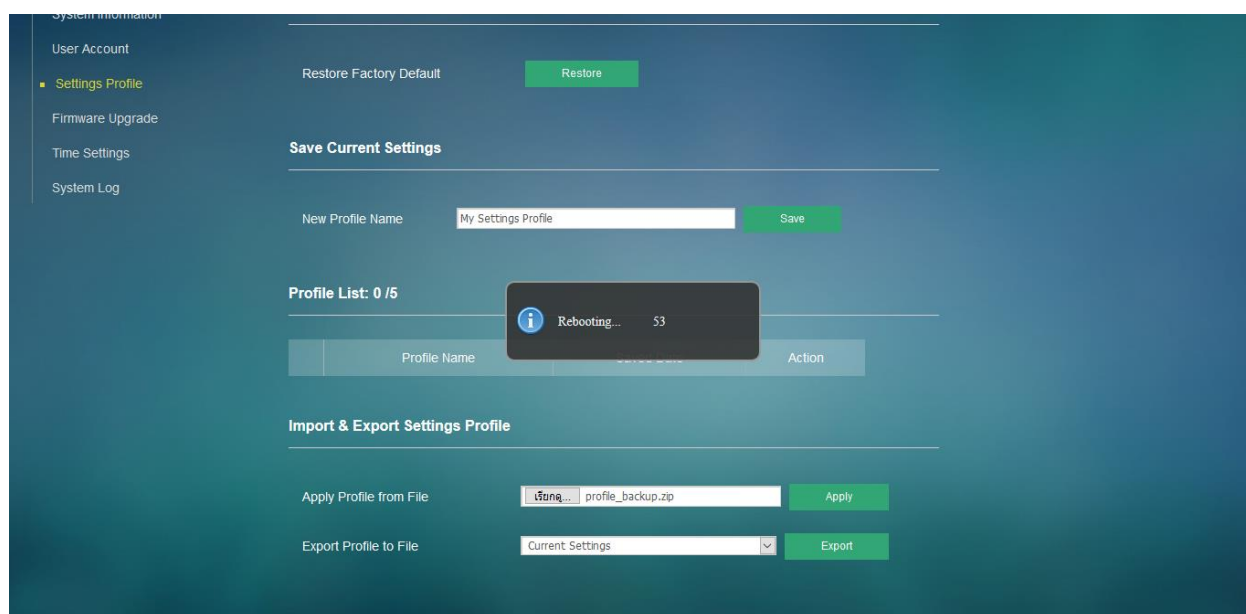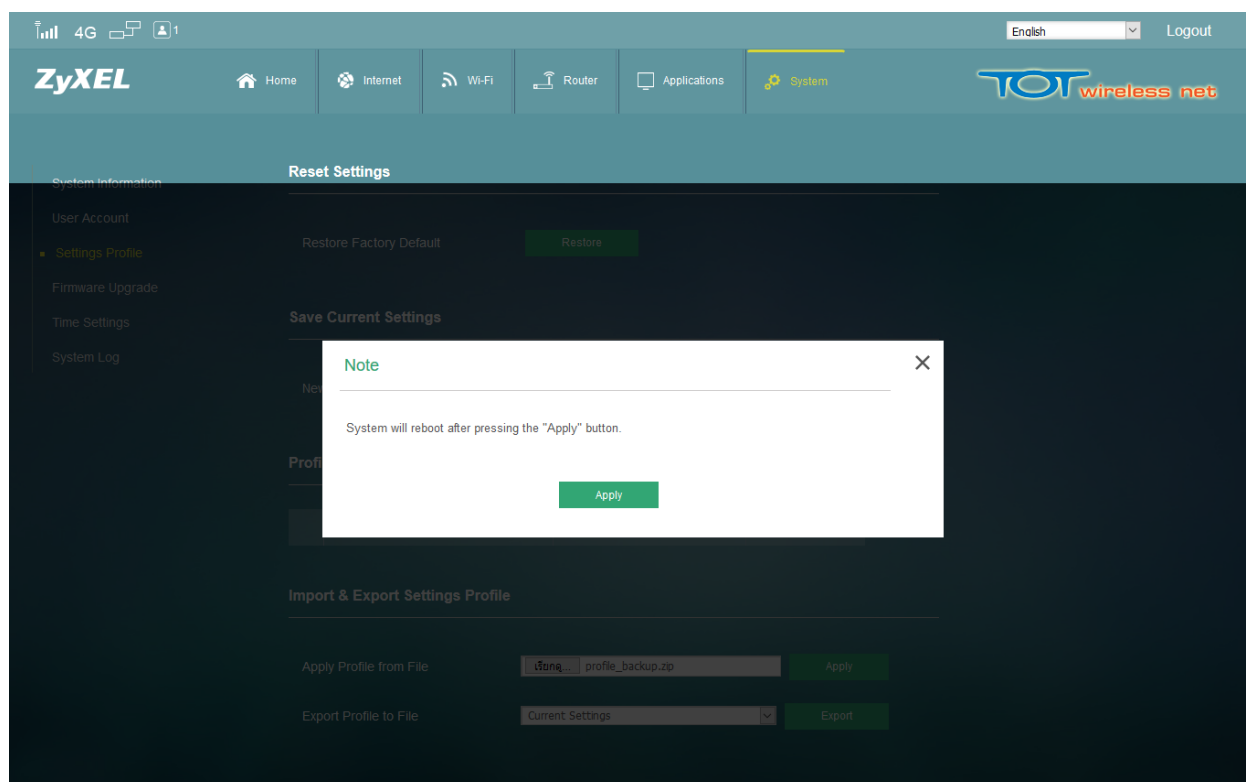

การ Upgrade Firmware สำหรับอุปกรณ์ Indoor และ Pocket ยี่ห้อ ZyXEL

1. เลือกคลิกที่ เมนู **System** (แถบเมนูหลักด้านบน) > เลือก **Settings Profile** (แถบเมนูซ้ายมือ) > **Firmware Upgrade** > คลิกเลือกไฟล์เฟิร์มแวร์ที่ได้ทำการดาวน์โหลดไว้ ใส่เครื่องหมายเลือก **After Upgrading the new firmware, restore the configuration to factory default** Apply อุปกรณ์จะทำการรีบูต (สามารถดาวน์โหลด Firmware ได้ที่ <http://wcs.intranet.tot.co.th/download/category/3-firmware>)

1.1 Indoor → V1.00(ABSJ.0)C0.bin

1.2 Pocket → V1.00(ABSH.1)C0.bin

หมายเหตุ กรุณาตรวจสอบรุ่นอุปกรณ์ก่อนการดำเนินการอัปเดตเฟิร์มแวร์ทุกครั้ง เพื่อป้องกันความเสียหายของอุปกรณ์

